



HOW TO FIND THE OPTIMUM COMBINATION OF STUD SIZED AND BASE METAL THICKNESS IN ORDER TO PREVENT REVERSE-SIDE MARKING.

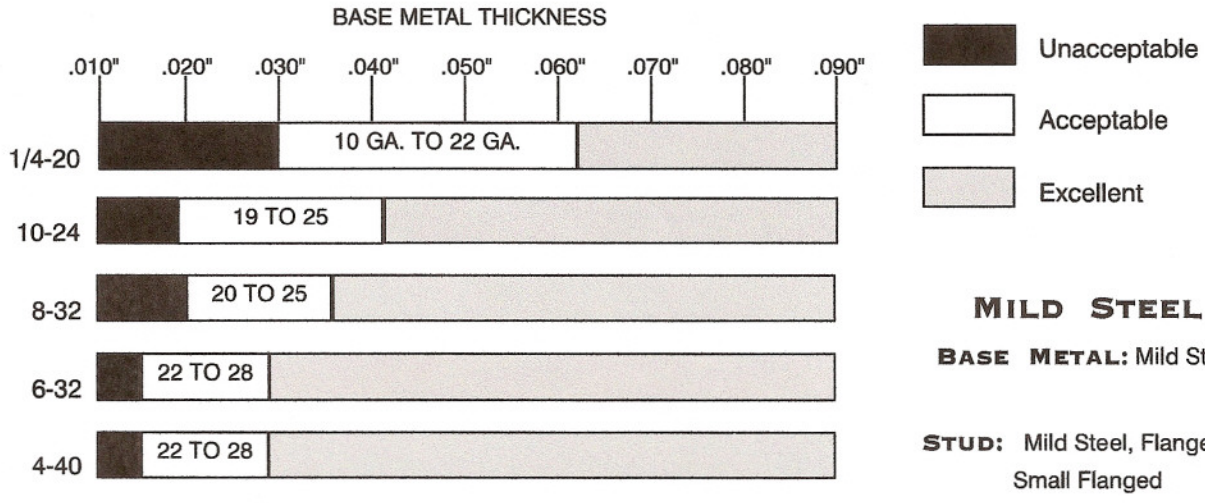

MILD STEEL

BASE METAL: Mild Steel


STUD: Mild Steel, Flanged or Small Flanged

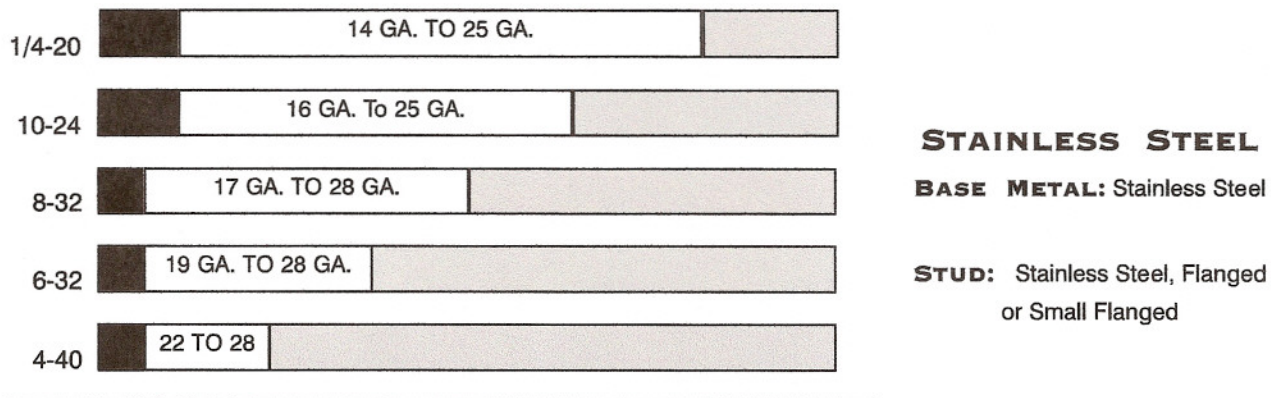

STAINLESS STEEL

BASE METAL: Stainless Steel

STUD: Stainless Steel, Flanged or Small Flanged

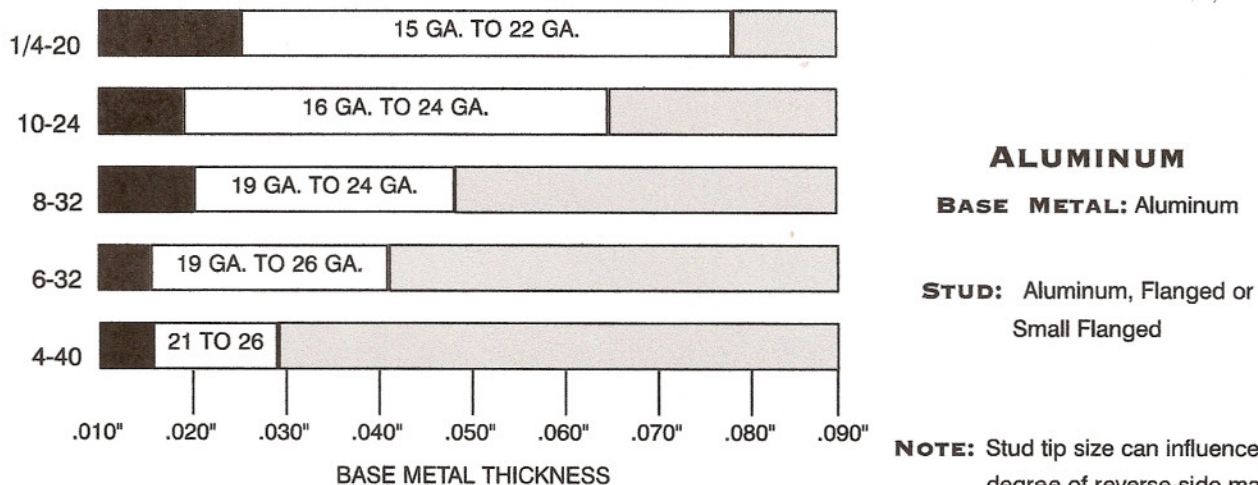

ALUMINUM

BASE METAL: Aluminum

STUD: Aluminum, Flanged or Small Flanged

NOTE: Stud tip size can influence the degree of reverse-side marking.

STUD WELDING PRODUCTS, INC.

Los Angeles • San Francisco • Seattle

Toll Free: (800) 252-1919 • www.studweldprod.com